

HLG-320HC Series

320W Single Output Switching Power Supplies



Case: 8916GH
252 x 90 x 43.8mm

Features

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- High Efficiency up to 95%
- Protections: Short circuit: OC / OV / OT
- Cooling by free air convection
- OCP point adjustable through internal potentiometer
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 7 years warranty



Specification

INPUT	Voltage	90 ~ 305VAC 127 ~ 431VDC								
	Frequency	47 ~ 63 Hz								
	Power Factor	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/277VAC at full load (please refer to "Power Factor Characteristic" curve)								
	Total Harmonic Distortion	Total harmonic distortion <20% when output loading \geq 50% at 115VAC/230VAC input and output loading \geq 75% at 277VAC input								
	Efficiency (230VAC)	91%	92.5%	93.5%	94%	94%	94.5%	95%	95%	95%
	Efficiency (277VAC)	91.5%	93%	94%	94.5%	94.5%	95%	95%	95%	95%
	AC Current	3.5A/115VAC	1.65A/230VAC	1.45A/277VAC						
	Inrush Current (Typ.)	Cold start 70A (twidth=1010 μ s measured at 50% Ipeak) at 230VAC								
OUTPUT	Leakage Current	<0.75mA/277VAC								
	MODEL No.	HLG-320H-12C	HLG-320H-15C	HLG-320H-20C	HLG-320H-24C	HLG-320H-30C	HLG-320H-36C	HLG-320H-42C	HLG-320H-48C	HLG-320H-54C
	DC Voltage	12V	15V	20V	24V	30V	36V	42V	48V	54V
	Constant Current Region	6 ~ 12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V
	Rated Current	22A	19A	15A	13.34A	10.7A	8.9A	7.65A	6.7A	5.95A
	Rated Power	264W	285W	300W	320.16W	321W	320.4W	321.3W	321.6W	321.3W
	R&N	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p
	Voltage Adj. Range	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	21 ~ 26V	26 ~ 32V	32 ~ 39V	38 ~ 45V	43 ~ 52V	49 ~ 58V
	Current Adj. Range	Can be adjusted by internal potentiometer								
		11 ~ 22A	9.5 ~ 19A	7.5 ~ 15A	6.67 ~ 13.3A	5.35 ~ 10.7A	4.45 ~ 8.9A	3.8 ~ 7.65	3.35 ~ 6.7A	2.97 ~ 5.95A
	Voltage Tolerance	\pm 3.0%	\pm 2.0%	\pm 1.5%	\pm 1.0%	\pm 1.0%	\pm 1.0%	\pm 1.0%	\pm 1.0%	\pm 1.0%
	Line Regulation	\pm 0.5%	\pm 0.5%	\pm 0.5%	\pm 0.5%	\pm 0.5%	\pm 0.5%	\pm 0.5%	\pm 0.5%	\pm 0.5%
	Load Regulation	\pm 2.0%	\pm 1.5%	\pm 1.0%	\pm 0.5%	\pm 0.5%	\pm 0.5%	\pm 0.5%	\pm 0.5%	\pm 0.5%
	Setup Rise Time	2500ms, 80ms at full load 230VAC/115VAC								
PROTECTION	Hold Up Time	15ms at full load 230VAC/115VAC								
	Over Current	95 ~ 108%								
		Protection type: Constant current limiting, recovers automatically after fault condition is removed								
	Short Circuit	Hiccup Mode: recovers automatically after fault condition is removed								
	Over Voltage	14 ~ 17V	17.5 ~ 21V	22.5 ~ 27V	27 ~ 33V	33 ~ 37V	40 ~ 46V	46.5 ~ 53V	53.5 ~ 60V	59 ~ 65V
ENVIRONMENT		Protection type: Shut down and latch off o/p voltage, re-power on to recover								
	Over Temperature	Shut down and latch off o/p voltage, re-power on to recover								
	Working Temperature	-40 ~ +70 °C (Refer to "Derating Curve")								
	Working Humidity	20 ~ 95% RH non-condensing								
	Storage Temp., Humidity	-40 ~ +80 °C, 10 ~ 95%RH								
SAFETY & EMC	Temp Coefficient	\pm 0.03%/°C (0 ~ 50°C)								
	Vibration	10 ~ 500Hz, 5G 12 min./1cycle, period for 72 min. each along X, Y, Z axes								
	Safety Standards	UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13, independent IP65 or IP67, J61347-1, J61347-2-13 approved								
	Withstand Voltage	I/P-O/P:3.75VAC I/P-FG:2KVAC O/P-FG:0.5KVAC								
	Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC/25°C/70% RH								
OTHERS	EMC Emission	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (\geq 50% load); EN61000-3-3								
	EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (Surge4kV), criteria B								
	M.T.B.F.	157.1Khrs min. MIL-HDBK-217F (25°C)								
	Packing	1.88Kg; 8pcs/16Kg/0.92CUFT								


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 °C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ f & 47 μ f parallel capacitor.
3. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18.
4. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.
5. Tolerance: includes set up tolerance, line regulation and load regulation.
6. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

HLG-320HC Series

320W Single Output Switching Power Supplies



Mechanical Specification

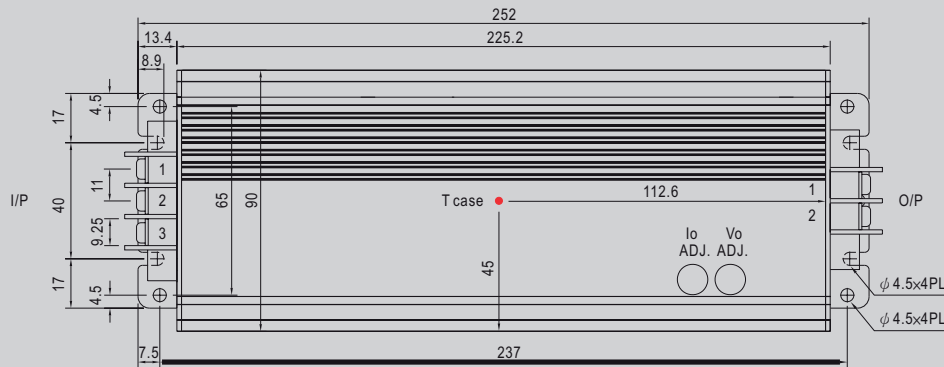

T case: Max. Case Temperature.

Output voltage and constant current level can be adjusted through internal potentiometer.
(Can access by removing the rubber stopper on the case.)


AC Input Terminal Pin No. Assignment

Pin No.	Assignment
1	FG \perp
2	AC/L
3	AC/N


DC Output Terminal Pin No. Assignment

Pin No.	Assignment
1	+V
2	-V


Block Diagram

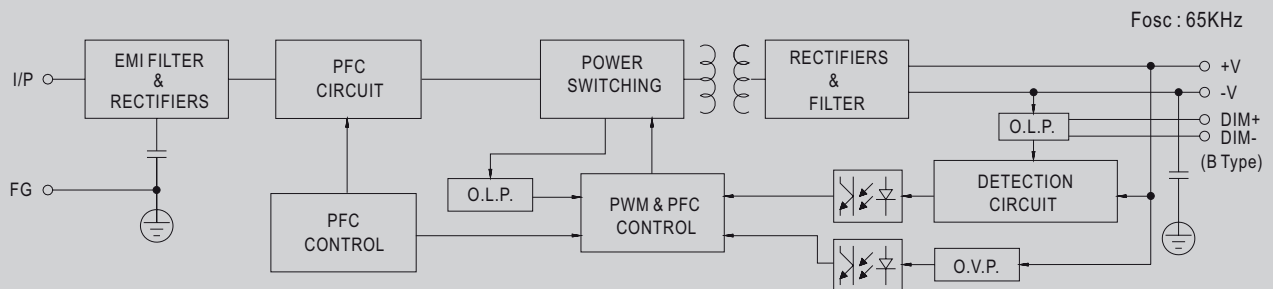

Derating Curve

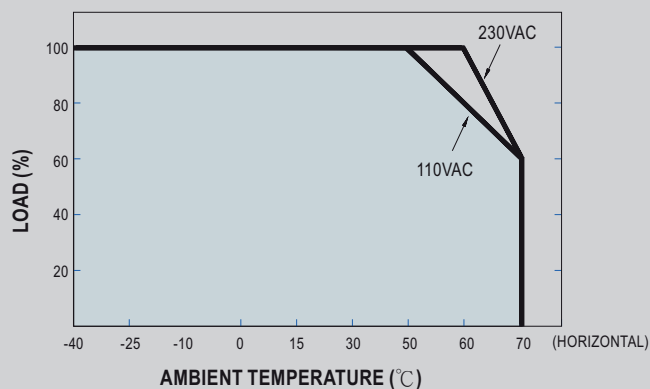

Static Characteristics

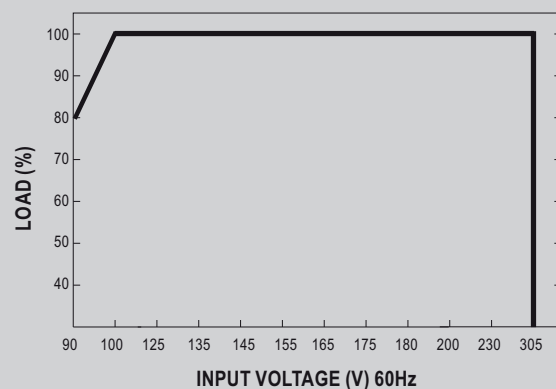


HLG-320HC Series

320W Single Output Switching Power Supplies




Power Factor Characteristic

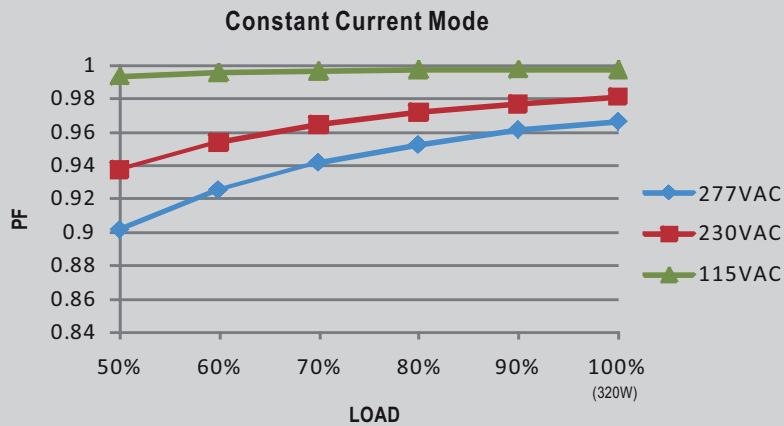

Efficiency vs Load (48V Model)

HLG-320H series possess superior working efficiency that up to 95% can be reached in field applications.

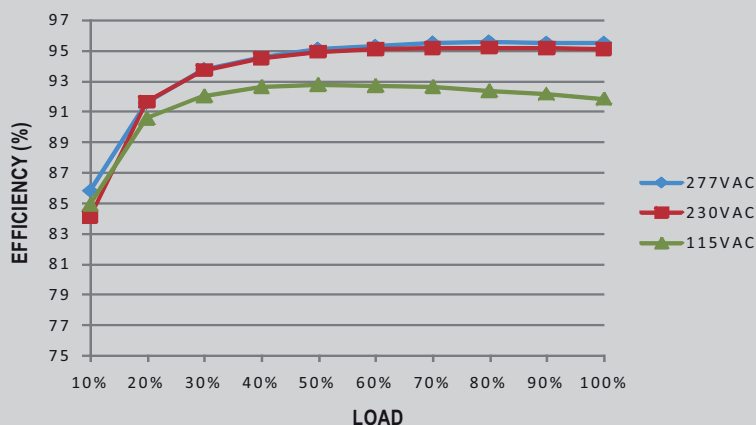


Driving Methods of LED Module

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B)).

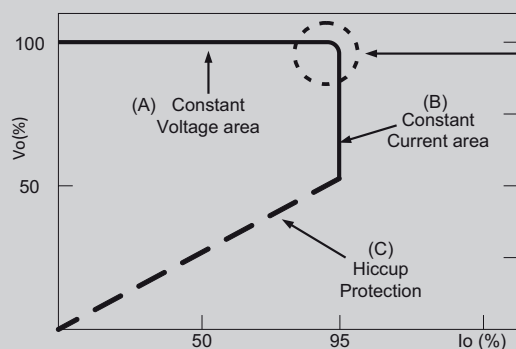

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.

Typical LED power supply I-V curve


HLG-320HC Series

320W Single Output Switching Power Supplies




Waterproof Connection

Waterproof connector can be assembled on the output cable of HLG-320H to operate in dry/wet/damp or outdoor environment.

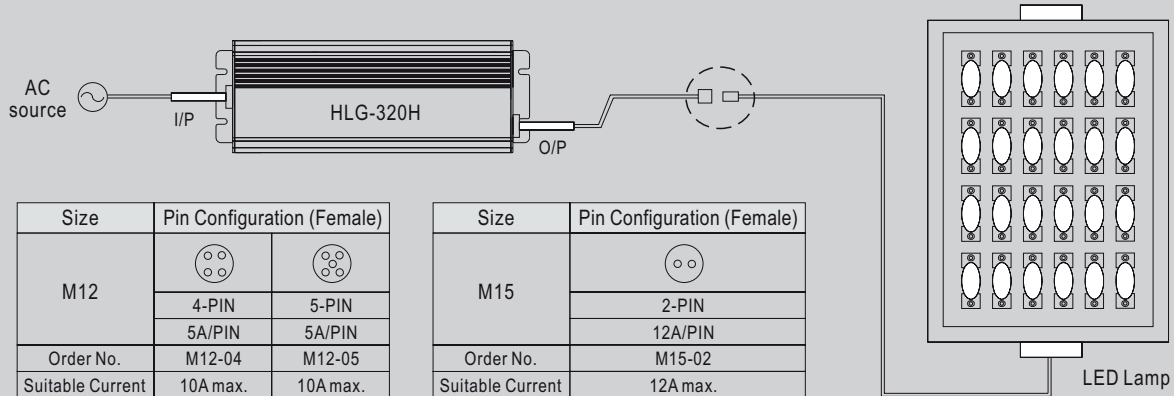


◎ Cable Joiner



CJ04-1 suitable for 14AWG~16AWG
CJ04-2 suitable for 18AWG~22AWG



Up to four wires can be connected through this cable joiner by soldering or clamping by tools.

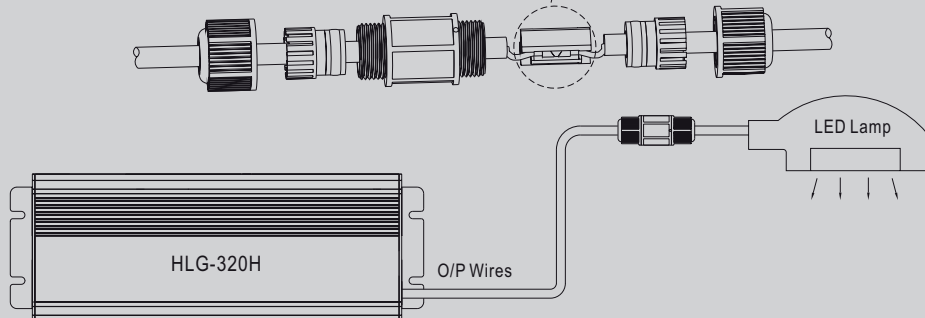

CJ04 cable joiner can be purchased independently for user's own assembly.

Junction Box (optional)

