


# EPS-15 Series

15W Single Output Switching Power Supply

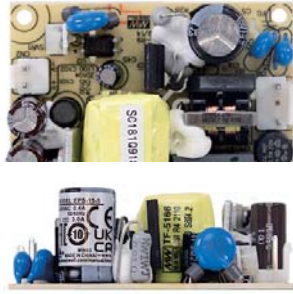

## Features :

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 1.8"x2.5" compact size
- No load power consumption < 0.3W
- Operating altitude up to 3000 meters
- 3 years warranty



## GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>




## SPECIFICATION

| MODEL                 | EPS-15-3.3  | EPS-15-5  | EPS-15-7.5  | EPS-15-12    | EPS-15-15    | EPS-15-24      | EPS-15-27  | EPS-15-36      | EPS-15-48    |              |
|-----------------------|---|---|-------------|--------------|--------------|----------------|------------|----------------|--------------|--------------|
| OUTPUT                | DC VOLTAGE  | 3.3V  | 5V          | 7.5V         | 12V          | 15V            | 24V        | 27V            | 36V          | 48V          |
|                       | RATED CURRENT   | 3A  | 3A          | 2A           | 1.25A        | 1A             | 0.625A     | 0.56A          | 0.42A        | 0.313A       |
|                       | CURRENT RANGE   | 0 ~ 3.3A  | 0 ~ 3.3A    | 0 ~ 2.2A     | 0 ~ 1.38A    | 0 ~ 1.1A       | 0 ~ 0.69A  | 0 ~ 0.615A     | 0 ~ 0.46A    | 0 ~ 0.344A   |
|                       | RATED POWER   | 9.9W  | 15W         | 15W          | 15W          | 15W            | 15W        | 15.12W         | 15.12W       | 15.02W       |
|                       | PEAK LOAD(10sec.) Note.6  | 10.89W  | 16.5W       | 16.5W        | 16.56W       | 16.5W          | 16.56W     | 16.6W          | 16.56W       | 16.51W       |
|                       | RIPPLE & NOISE (max.) Note.2  | 50mVp-p   | 50mVp-p     | 80mVp-p      | 80mVp-p      | 100mVp-p       | 150mVp-p   | 180mVp-p       | 200mVp-p     | 200mVp-p     |
|                       | VOLTAGE ADJ. RANGE  | 3.1 ~ 3.6V  | 4.75 ~ 5.5V | 7.13 ~ 8.25V | 10.8 ~ 13.5V | 13.5 ~ 16.5V   | 21.6 ~ 27V | 24.3 ~ 29.7V   | 32.4 ~ 39.6V | 43.2 ~ 52.8V |
|                       | VOLTAGE TOLERANCE Note.3  | ±2.0%   | ±2.0%       | ±2.0%        | ±1.0%        | ±1.0%          | ±1.0%      | ±1.0%          | ±1.0%        | ±1.0%        |
|                       | LINE REGULATION   | ±0.5%   | ±0.5%       | ±0.5%        | ±0.5%        | ±0.5%          | ±0.5%      | ±0.5%          | ±0.5%        | ±0.5%        |
|                       | LOAD REGULATION   | ±1.0%   | ±1.0%       | ±1.0%        | ±0.5%        | ±0.5%          | ±0.5%      | ±0.5%          | ±0.5%        | ±0.5%        |
| SETUP, RISE TIME      | 1000ms, 30ms/230VAC    2000ms, 30ms/115VAC at full load   |   |             |              |              |                |            |                |              |              |
| HOLD UP TIME (Typ.)   | 50ms/230VAC    16ms/115VAC at full load   |   |             |              |              |                |            |                |              |              |
| INPUT                 | VOLTAGE RANGE Note.5  | 85 ~ 264VAC    120 ~ 370VDC    [DC input operation possible by connecting AC/N(+), AC/L(-)]                             |             |              |              |                |            |                |              |              |
|                       | FREQUENCY RANGE   | 47 ~ 63Hz   |             |              |              |                |            |                |              |              |
|                       | EFFICIENCY (Typ.)   | 75%   | 78%         | 81%          | 82%          | 83%            | 83%        | 84%            | 85%          | 85%          |
|                       | AC CURRENT (Typ.)   | 0.4A/115VAC   |             | 0.2A/230VAC  |              |                |            |                |              |              |
|                       | INRUSH CURRENT (Typ.)   | COLD START 45A/230VAC   |             |              |              |                |            |                |              |              |
| LEAKAGE CURRENT       | <1mA/240VAC   |   |             |              |              |                |            |                |              |              |
| PROTECTION            | OVER LOAD   | 115 ~ 150% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed |             |              |              |                |            |                |              |              |
|                       | OVER VOLTAGE  | 3.8 ~ 4.85V   | 5.6 ~ 6.75V | 8.63 ~ 10.1V | 13.8 ~ 16.2V | 17.25 ~ 20.25V | 27.6 ~ 33V | 31.05 ~ 36.45V | 39.7 ~ 46.8V | 55.2 ~ 65.8V |
|                       |   | Protection type : Shut down o/p voltage, Clamping by zener diode  |             |              |              |                |            |                |              |              |
| ENVIRONMENT           | WORKING TEMP.   | -30 ~ +70°C (Refer to "Derating Curve")   |             |              |              |                |            |                |              |              |
|                       | WORKING HUMIDITY  | 20 ~ 90% RH non-condensing  |             |              |              |                |            |                |              |              |
|                       | STORAGE TEMP., HUMIDITY   | -40 ~ +85°C, 10 ~ 95% RH  |             |              |              |                |            |                |              |              |
|                       | TEMP. COEFFICIENT   | ±0.03%/°C (0 ~ 50°C)  |             |              |              |                |            |                |              |              |
|                       | OPERATING ALTITUDE Note.7   | 3000 meters   |             |              |              |                |            |                |              |              |
| SAFETY & EMC (Note 4) | VIBRATION   | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes   |             |              |              |                |            |                |              |              |
|                       | SAFETY STANDARDS  | UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, CCC GB4943.1 approved  |             |              |              |                |            |                |              |              |
|                       | WITHSTAND VOLTAGE   | I/P-O/P:3KVAC   |             |              | I/P-FG:2KVAC |                |            | O/P-FG:0.5KVAC |              |              |
|                       | ISOLATION RESISTANCE  | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH  |             |              |              |                |            |                |              |              |
|                       | EMC EMISSION  | Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020, GB9254 Class B, GB17625.1           |             |              |              |                |            |                |              |              |
| EMC IMMUNITY          | Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN55035, heavy industry level, EAC TP TC 020  |   |             |              |              |                |            |                |              |              |
| OTHERS                | MTBF  | 6024.7K hrs min.    Telcordia SR-332 (Bellcore) ; 849.3K hrs min.    MIL-HDBK-217F (25°C)                               |             |              |              |                |            |                |              |              |
|                       | DIMENSION   | 63.5*45.7*24mm (L*W*H)  |             |              |              |                |            |                |              |              |
|                       | PACKING   | 0.057Kg; 120pcs/ 7.84Kg/0.94CUFT  |             |              |              |                |            |                |              |              |
| NOTE                  | <ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μF &amp; 47 μF parallel capacitor.</li> <li>3. Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. (as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a> )</li> <li>5. Derating may be needed under low input voltage. Please check the static characteristics for more details.</li> <li>6. 33% Duty cycle maximum within every 30 seconds. Average output power should not exceed the rated power.</li> <li>7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</li> </ol> <p>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a></p> |   |             |              |              |                |            |                |              |              |

File Name:EPS-15-SPEC 2024-09-30

### Mechanical Specification

(Unit: mm, tolerance  $\pm 1$ mm)

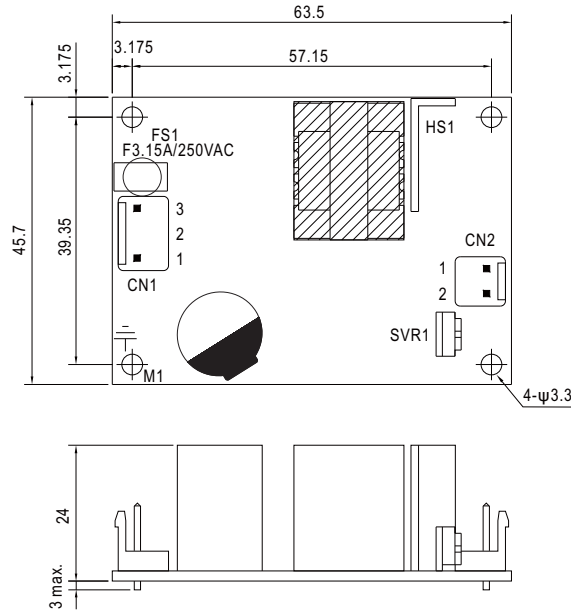

AC Input Connector (CN1) : JST B3P-VH or equivalent


| Pin No. | Assignment | Mating Housing        | Terminal                       |
|---------|------------|-----------------------|--------------------------------|
| 1       | AC/N(+)    | JST VHR or equivalent | JST SVH-21T-P1.1 or equivalent |
| 2       | No Pin     |                       |                                |
| 3       | AC/L(-)    |                       |                                |

DC Output Connector (CN2) : JST B2P-VH or equivalent


| Pin No. | Assignment | Mating Housing        | Terminal                       |
|---------|------------|-----------------------|--------------------------------|
| 1       | +V         | JST VHR or equivalent | JST SVH-21T-P1.1 or equivalent |
| 2       | -V         |                       |                                |

⊥ : Grounding Required  
M1 is safety ground

### Block Diagram

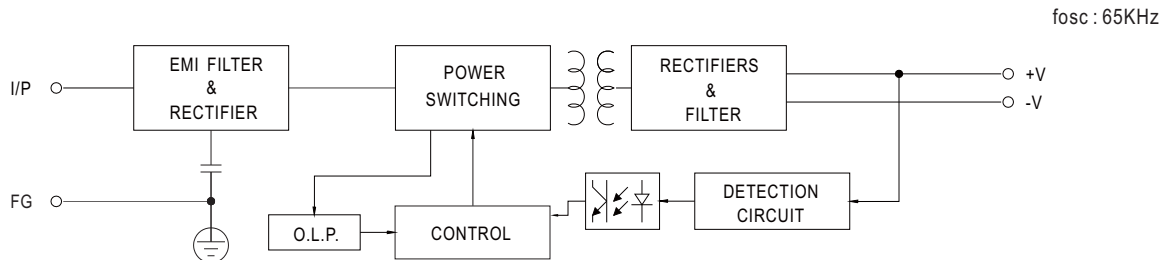

### Output Derating

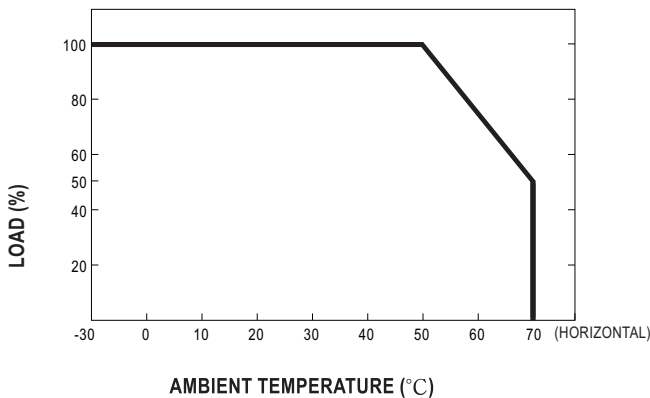

### Static Characteristics

