

EA1015R Series

10~15W AC-DC Wall Mount Interchangeable Plug



Case No: 8033DG

71 x 45.5 x 35 mm Not including AC plug dimensions

Features

- CEC Compliance
- RoHS compliance
- Interchangeable AC plugs (plug kit available separately)
- Over voltage and short circuit protection
- Protection Type: Auto recovery
- MTBF: >30,000 hours



Specification


INPUT	Voltage	90~264VAC universal full range					
	Frequency	47 ----- 63 Hz					
	Current	<1.0A@115VAC; 0.5A@230VAC input, full load					
	Inrush Current	<20A@115V , <40A@230V AC input, Cold start at 25°C ambient					
OUTPUT	MODEL No.	EA1015AR-5	EA1015BR-9	EA1015CR-12	EA1015CR-15	EA1015DR-18	EA1015DR-24
	Voltage	5V	9V	12V	15V	18V	24V
	Rated Current	2A	1.3A	1.25A	1A	0.83A	0.625A
	Line Regulation	± 1%					
	Load Regulation	± 5%					
	Ripple Noise MAX.	100mV	180mV	240mV	250mV	285mV	350mV
	Efficiency (TYP.)	73.37%	77.7%	79.26%	79.26%	29.24%	79.26%
	Power	10W	12W	15W	15W	15W	15W
PROTECTION	Over Voltage	Auto-recovery					
	Short Circuit	When the power supply is over 105%~ 150% max load or short circuited it will go into hiccup mode and recover automatically after the fault is removed.					
ENVIRONMENT	Temperature	Operating: -0 ~ +40°C; Storage: -20 ~ +85°C					
	Humidity	Operating: 5% ~ 95% RH					
SAFETY	Safety Standard	UL60950-1; TUV EN60950-1; IEC60950-1 Approved					
OTHERS	Cooling	Natural cooling					
	M.T.B.F.	30K hrs min. MIL-HDBK-217F (°C)					

1 Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminates with a 0.1uf & 47uf parallel capacitor

2 Line regulation is defined by changing ±10% of input voltage from nominal line at rated load

3 Max output power (W) ≥Vo x Io

Dimensions

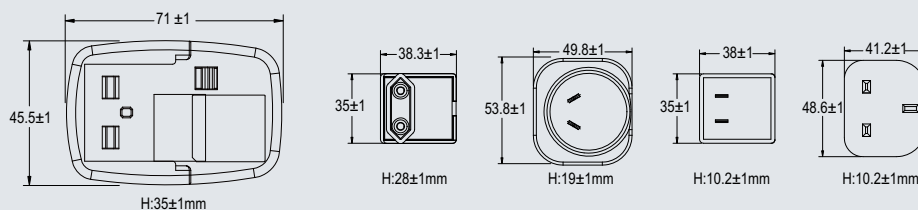

DC Tip Dimensions: 5.5 x 2.1 mm