

# DRP-240 Series

240W Single Output Industrial DIN Rail Power Supply



## Features

- Universal AC input/Full function
- Built-in active PFC function
- Protections: Short Circuit / Overload / Over voltage / Over Temperature
- Cooling by Free Air Convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508 (Industrial Control Equipment) approved
- LED indicator for power on
- 100% full load burn-in test
- Fixed Switching Frequency at 100KHz
- 3 years warranty



## Specification

INPUT	<b>Voltage</b>	85V~264VAC	120~370VAC
	<b>Frequency</b>	47 ~ 63 Hz	
	<b>POWER FACTOR (Typ.)</b>	0.96/230VAC	0.99/115VAC at full load
	<b>Inrush Current (Typ.)</b>	Cold start 27A/115VAC	45A/230VAC
	<b>Leakage Current</b>	<3.5mA/240VAC	
	<b>Efficiency</b>	84%	85%
OUTPUT	<b>MODEL No.</b>	<b>DRP-240-24</b>	<b>DRP-240-48</b>
	<b>Voltage</b>	24V	48V
	<b>Rated Current</b>	10A	5A
	<b>Current Range</b>	0~10A	0~5A
	<b>Rated Power</b>	240W	240W
	<b>Ripple Noise MAX.</b>	80mVp-p	150mVp-p
	<b>Voltage Adjustment Range</b>	24 ~ 28V	48 ~ 53V
	<b>Voltage Tolerance</b>	± 1.0%	± 1.0%
	<b>Line Regulation</b>	± 0.5%	± 0.5%
	<b>Load Regulation</b>	± 1.0%	± 1.0%
	<b>Setup Rise Time</b>	800ms, 40ms/230VAC	800ms, 40ms/115VAC at full load
	<b>Holdup Time (Typ.)</b>	24ms/230VAC	24ms/115VAC at full load
PROTECTION	<b>Over Load</b>	105 ~ 150% rated output power Protection Type: Constant current limiting, recovers automatically after fault condition is removed	
	<b>Over Voltage</b>	30 ~ 36V	54 ~ 60V
	<b>Over Temperature</b>	Shut down o/p voltage, re-powers onto recover	
	<b>Working Temperature</b>	Shut down o/p voltage, recovers automatically after temperature goes down	
ENVIRONMENT	<b>Working Humidity</b>	-10 ~ +70°C (Refer to "Derating Curve")	
	<b>Storage Temp., Humidity</b>	20 ~ 90% RH non-condensing	
	<b>Temp. Co-efficient</b>	±0.03% / °C (0~50°C)	
	<b>Vibration</b>	10 ~ 500Hz, 2G 10min./1cycle, period for 60 min. each along X, Y, Z axes; Mounting: compliance to IEC60068-2-6	
SAFETY & EMC	<b>Safety Standards</b>	UL508, UL60950-1, TUV EN60950-1 approved	
	<b>Withstand Voltage</b>	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC	
	<b>Isolation Resistance</b>	I/P-OP I/P-FG, O/P-FG: 100M Ohms/500Vdc	
	<b>EMC Emission</b>	Compliance to EN55011,EN55032 (CISPR32) Class B, EN61000-3-2,-3	
	<b>EMC Immunity</b>	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN61000-6-2 (EN50082-2) Heavy industry level, criteria A	
OTHERS	<b>M.T.B.F.</b>	289.9K hrs min. MIL-HDBK-217F (25°C)	
	<b>Packaging</b>	1.2Kg, 12pcs/15.5Kg/1.29CUFT	


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple and noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
3. Tolerance: includes set up tolerance, line regulation and load regulation.
4. The power supply is considered as a component which will be installed with final equipment. The final equipment must re-confirmed that it still meets EMC Directives.
5. Derating may be needed under low input voltages. Please check the derating curve for more details.

# DRP-240 Series





240W Single Output Industrial DIN Rail Power Supply



## Mechanical Specification

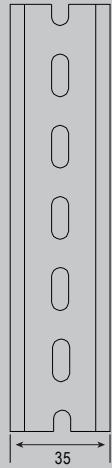

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

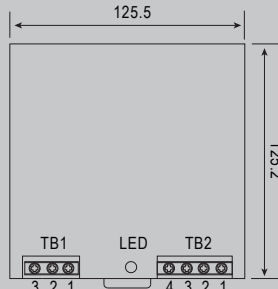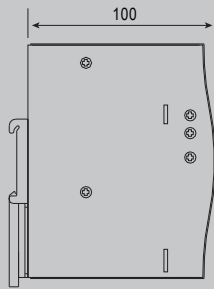


### Terminal Pin Number Assignment (TB1)

Pin No.	Assignment
1	FG ⊕
2	AC/N
3	AC/L


### Terminal Pin Number Assignment (TB2)

Pin No.	Assignment
1,2	DC OUTPUT +V
3,4	DC OUTPUT -V

## Block Diagram

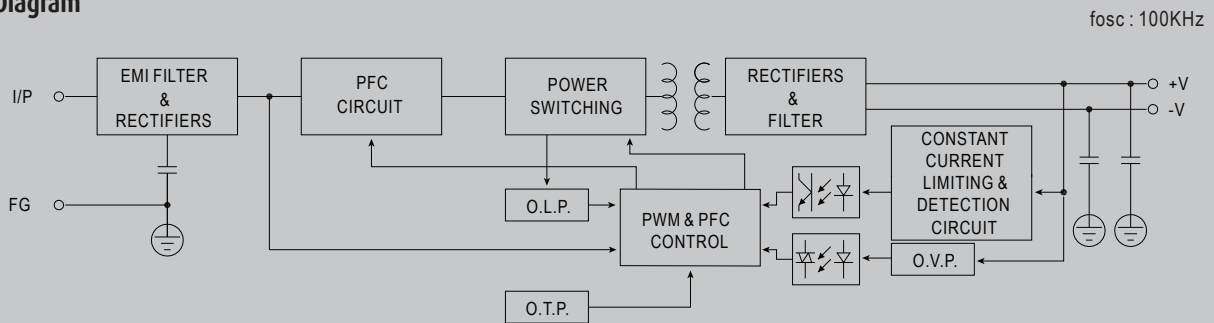

## Derating Curve

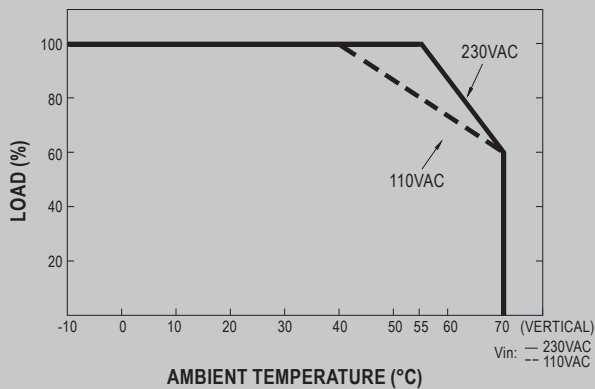

## Output Derating VS Input Voltage

