


HDD POWER CABLE(S-ATA) : WH-PS610-850



HD-2						
CONNECTION TO	PIN No.	MAX CURRENT	FUNCTION	WIRE		CONNECTOR TYPE
				COLOR	TYPE	
P4:5Pin	1	5.6A	+3.3V	ORANGE	UL1007 AWG#18	Housing: 5557-10R (Molex) or (equivalent) Terminal: 5556 (Molex) or (equivalent)
P3:4Pin	2	5.6A	+5V	RED		
P3:3Pin	3	5.6A	COM	BLACK		
P3:2Pin	4	5.6A	COM	BLACK		
P3:1Pin	5	5.6A	+12V	YELLOW		
-	6	-	N.C.	-		
P6:4Pin	7	5.6A	+5V	RED		
P6:3Pin	8	5.6A	COM	BLACK		
P6:2Pin	9	5.6A	COM	BLACK		
P6:1Pin	10	5.6A	+12V	YELLOW		

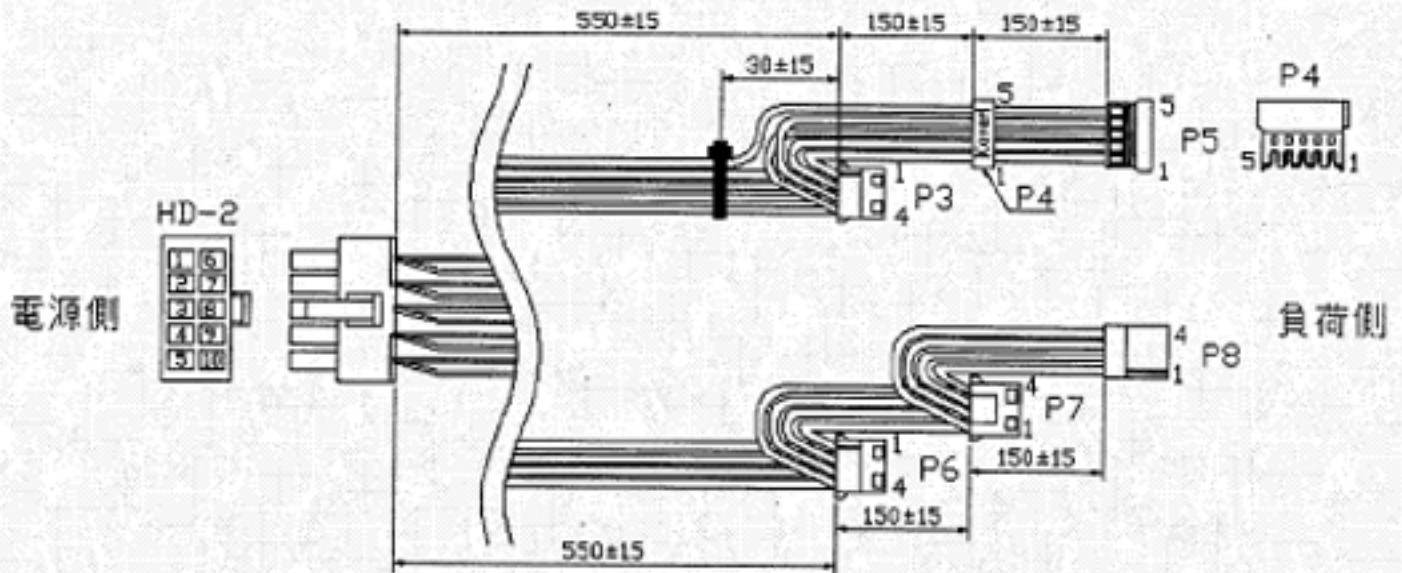

Sunpower (UK) Ltd

Orion House, Calleva Park, Aldermaston, Berkshire, RG7 8SN

Tel: +44 (0)118 981 1001 Fax: +44 (0)118 981 2002 E-mail: sales@sunpower-uk.com

P3

CONNECTION TO	PIN No.	MAX CURRENT	FUNCTION	WIRE		CONNECTOR TYPE
				COLOR	TYPE	
△ HD-2:5Pin / P4:1Pin	1	5.6A	+12V	YELLOW	UL1007 AWG#18	Housing: LCP-04 (JST) Terminal: SLC22T-2.0 (JST)
△ HD-2:4Pin / P4:2Pin	2	5.6A	COM	BLACK		
△ HD-2:3Pin / P4:4Pin	3	5.6A	COM	BLACK		
△ HD-2:2Pin / P4:3Pin	4	5.6A	+5V	RED		

P4

CONNECTION TO	WIRE No.	MAX CURRENT	FUNCTION	WIRE		CONNECTOR TYPE
				COLOR	TYPE	
P3:1Pin / P5:1Pin	1	5.6A	+12V	YELLOW	UL1007 AWG#18	Housing: CI94PFIA1A0 (CvLux) or (equivalent) Cover: CI94PFC010 (CvLux) or (equivalent)
P3:2Pin / P5:2Pin	2	5.6A	COM	BLACK		
P3:4Pin / P5:3Pin	3	5.6A	+5V	RED		
P3:3Pin / P5:4Pin	4	5.6A	COM	BLACK		
HD-2:1Pin / P5:5Pin	5	5.6A	+3.3V	ORANGE		

P5

CONNECTION TO	WIRE No.	MAX CURRENT	FUNCTION	WIRE		CONNECTOR TYPE
				COLOR	TYPE	
P4:1Pin	1	5.6A	+12V	YELLOW	UL1007 AWG#18	Housing: CI94PF00100 (CvLux) or (equivalent) Terminal: CI94T03APP0 (CvLux) or (equivalent)
P4:2Pin	2	5.6A	COM	BLACK		
P4:3Pin	3	5.6A	+5V	RED		
P4:4Pin	4	5.6A	COM	BLACK		
P4:5Pin	5	5.6A	+3.3V	ORANGE		

P6

CONNECTION TO	PIN No.	MAX CURRENT	FUNCTION	WIRE		CONNECTOR TYPE
				COLOR	TYPE	
△ HD-2:10Pin / P7:1Pin	1	5.6A	+12V	YELLOW	UL1007 AWG#18	Housing: LCP-04 (JST) Terminal: SLC22T-2.0 (JST)
△ HD-2:9Pin / P7:2Pin	2	5.6A	COM	BLACK		
△ HD-2:8Pin / P7:3Pin	3	5.6A	COM	BLACK		
△ HD-2:7Pin / P7:4Pin	4	5.6A	+5V	RED		

P7

CONNECTION TO	PIN No.	MAX CURRENT	FUNCTION	WIRE		CONNECTOR TYPE
				COLOR	TYPE	
P6:1Pin / P8:4Pin	1	5.6A	+12V	YELLOW	UL1007 AWG#18	Housing: LCP-04 (JST) Terminal: SLC22T-2.0 (JST)
P6:2Pin / P8:3Pin	2	5.6A	COM	BLACK		
P6:3Pin / P8:2Pin	3	5.6A	COM	BLACK		
P6:4Pin / P8:1Pin	4	5.6A	+5V	RED		

P8

CONNECTION TO	PIN No.	MAX CURRENT	FUNCTION	WIRE		CONNECTOR TYPE
				COLOR	TYPE	
P7:4Pin	1	1.6A	+5V	RED	UL1007 AWG#22	Housing: 171022-4 (AMP) Terminal: 170204-1 (AMP)
P7:3Pin	2	1.6A	COM	BLACK		
P7:2Pin	3	1.6A	COM	BLACK		
P7:1Pin	4	1.6A	+12V	YELLOW		

B版 △ ×8 片岡 I-170601A (誤記訂正)

A版 △ ×4 片岡 I-170601 (誤記訂正)



Sunpower (UK) Ltd

Orion House, Calleva Park, Aldermaston, Berkshire, RG7 8SN

Tel: +44 (0)118 981 1001 Fax: +44 (0)118 981 2002 E-mail: sales@sunpower-uk.com